DRB-IR-I016
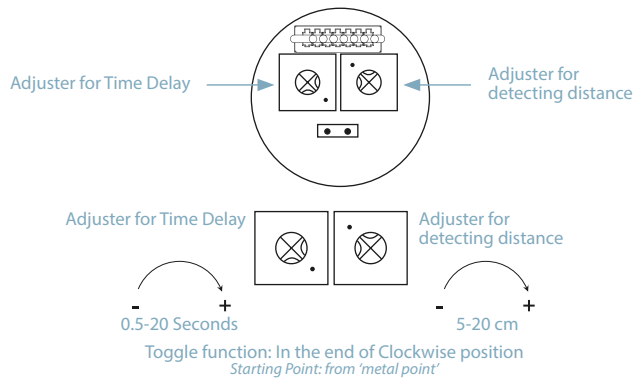
Flush IR Button

- Brushed Stainless Steel Plate
- IR Button
- Surface mount
- COM-N/O - N/C
- 12~24VDC Operation


SETTINGS

Adjuster for Time Delay

Adjuster for detecting distance

Adjuster for Time Delay

Adjuster for detecting distance

− 0.5-20 Seconds +

− 5-20 cm +

Toggle function: In the end of Clockwise position
Starting Point: from 'metal point'

## INT/EXT MODE

INT MODE

EXT MODE

INT: Factory setting, with Jumper open LEDs will be controlled by IR button

EXT: with Jumper closed LEDs will be controlled by system

CABLES

PIN

Red cable: 12-24VDC

Black cable: 0VDC

Yellow: Green LED controlled in EXT

White: Red LED controlled in EXT mode

Green: N.O

Blue: COM

Purple: N.C

Change-over Contact