


FR-SL500

Micro Shear-Lock


- FD30 + FD60 Rating
- Operating voltage 12~24Vdc
- Holding force up to 2,600lbs (1,200Kg) in shear
- Locking time delay: 0.5 to 25 seconds (Adjustable)
- N.C/N.O/Com
- 1 Hour UK fire certificate



BS EN1634:1

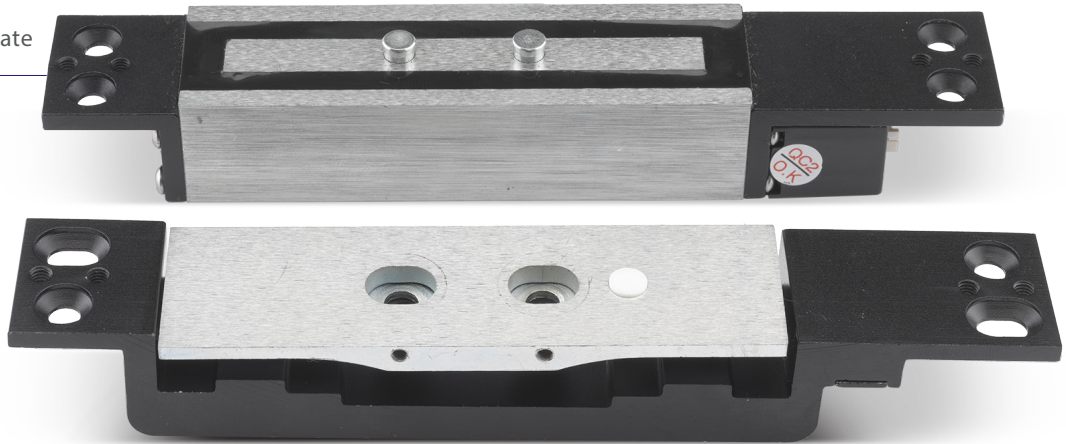

This product must be fitted with the intumescent pack provided

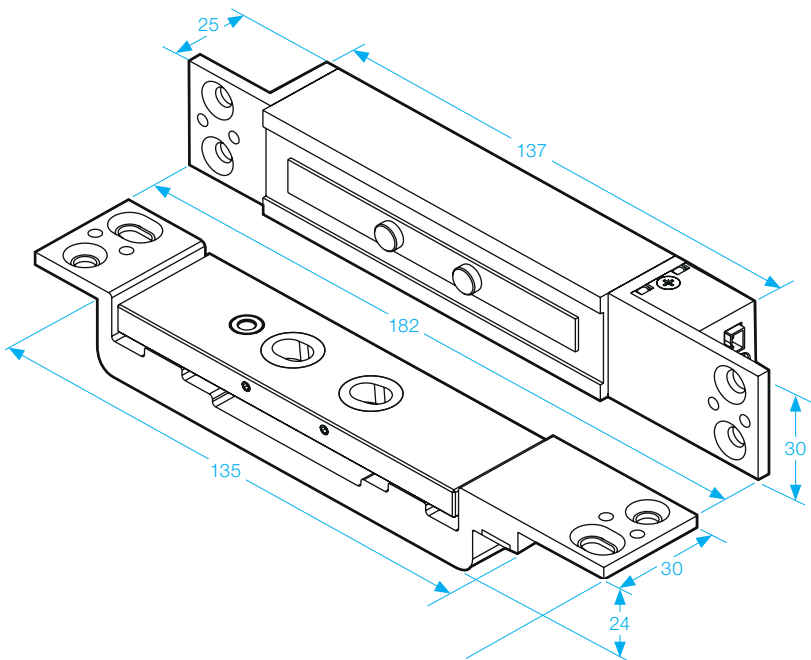

INTUMESCENT PACK

