


10423




## Solenoid Electric Bolt

- Operating voltage 12Vdc
- Fail-Safe
- Auto-relocking timer delay:  
0, 3, 6 or 9 seconds

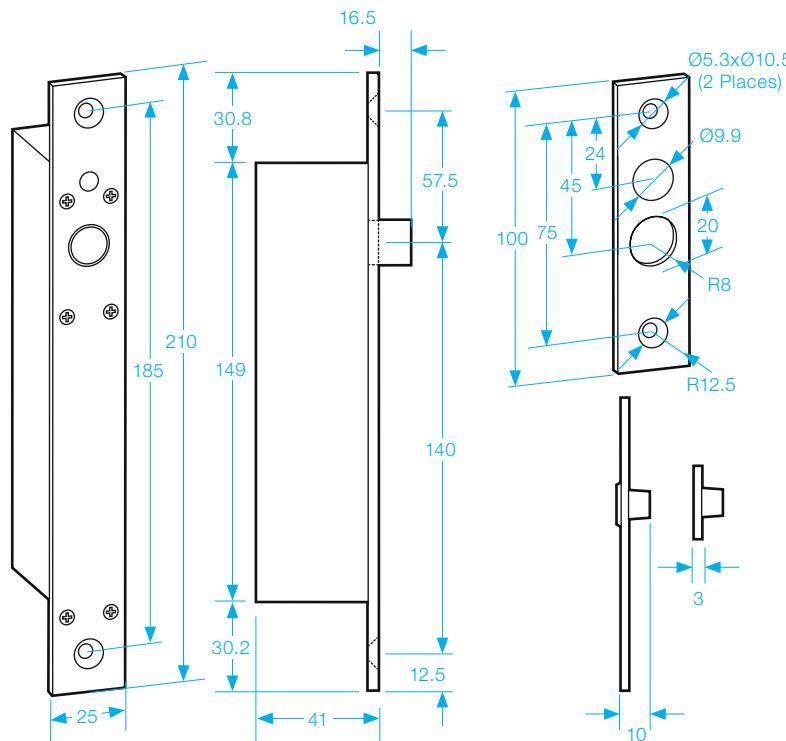

## AUTO RELOCKING TIMER SETTINGS

Use jumpers to adjust the time between 0 to 9 seconds for door locking time delay. This is the time, which takes the dropbolt to automatically lock after the door is closed.

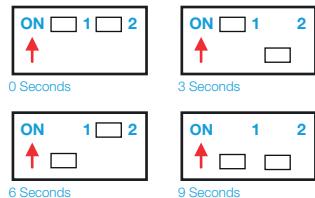

## SPECIFICATION

- Voltage tolerance:  $\pm 10\%$ .
- Current draw: Pull in 1A, Holding 0.4A at 12Vdc (*at temperature 20°C*).
- Operating temperature: -10~45°C (14 to 131°F).
- Lock's surface temperature: Current temperature  $\pm 20\%$  (*when power is on*).
- Magnetic bolt status output indicates bolt locked or unlocked status (*SPDT rated 3A at 30Vdc*).

- Humidity: 0~95% non-condensing.
- Tested to 500,000 cycles.
- Horizontal or vertical installation.
- Weight: 1.2kg (approx).