
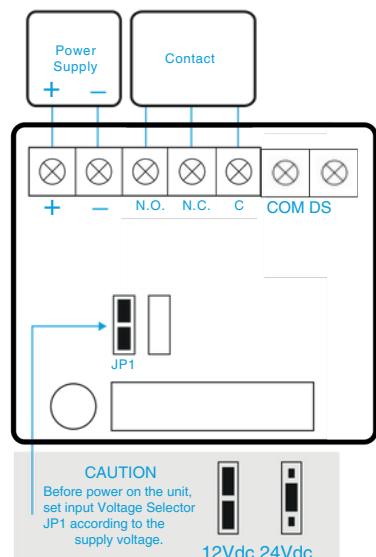


A-10040DS Monitored with Door Status

Monitored Double Standard Magnet

- Operating voltage 12~24Vdc (Selectable)
- Aluminium housing
- Holding force up to 2 x 1200lbs (544Kg)
- Electro-less nickel plated armature Status
- Status LED ● Red ● Green
- **Door status:** An independent contact that works separately from the magnet to show door status not lock status

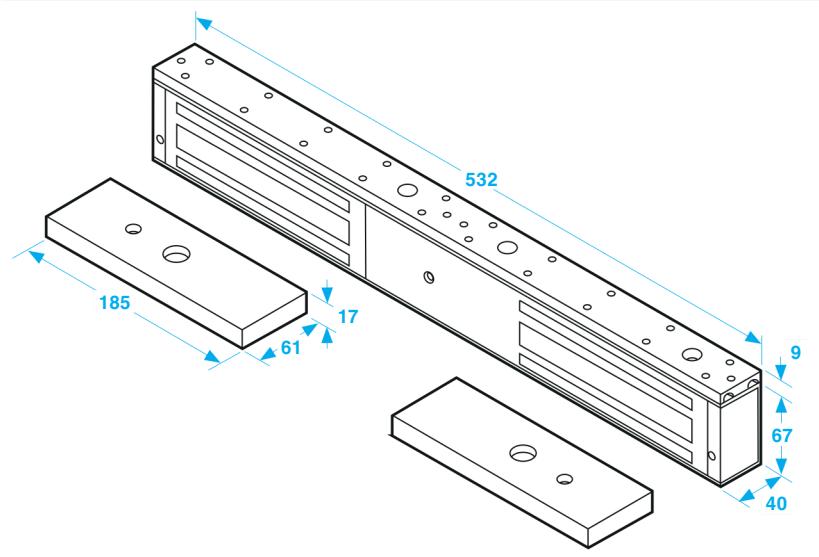

SPECIFICATION

- Voltage tolerance: $\pm 10\%$.
- Current draw: 420mA at 12Vdc, 210mA at 24Vdc (at temperature 20°C).
- Operating temperature: -10~55°C (14 to 131°F).
- Lock's surface temperature: Current temperature $\pm 20\%$ (when power is on).

- Magnetic bond sensor monitor output remotely monitors the door lock or unlock status. (N.C. Output-Door opened; N.O. Output-door closed) (SPDT Rated 0.25A at 12Vdc)
- Humidity: 0~95% non-condensing.
- Aluminium housing, nickel plated armature.
- Weight: 9.3kg (approx).