


DEM0010

Wiring Diagram

1. Input voltage equals to output voltage.
2. When the START trigger is activated, BUZZER turns on and delay time output turns off. This condition remains until RESET trigger is disabled.
3. When RESET trigger is disabled, BUZZER turns off and delay time output turns on.
4. Delay time can be set from 0.1 to 15 seconds.

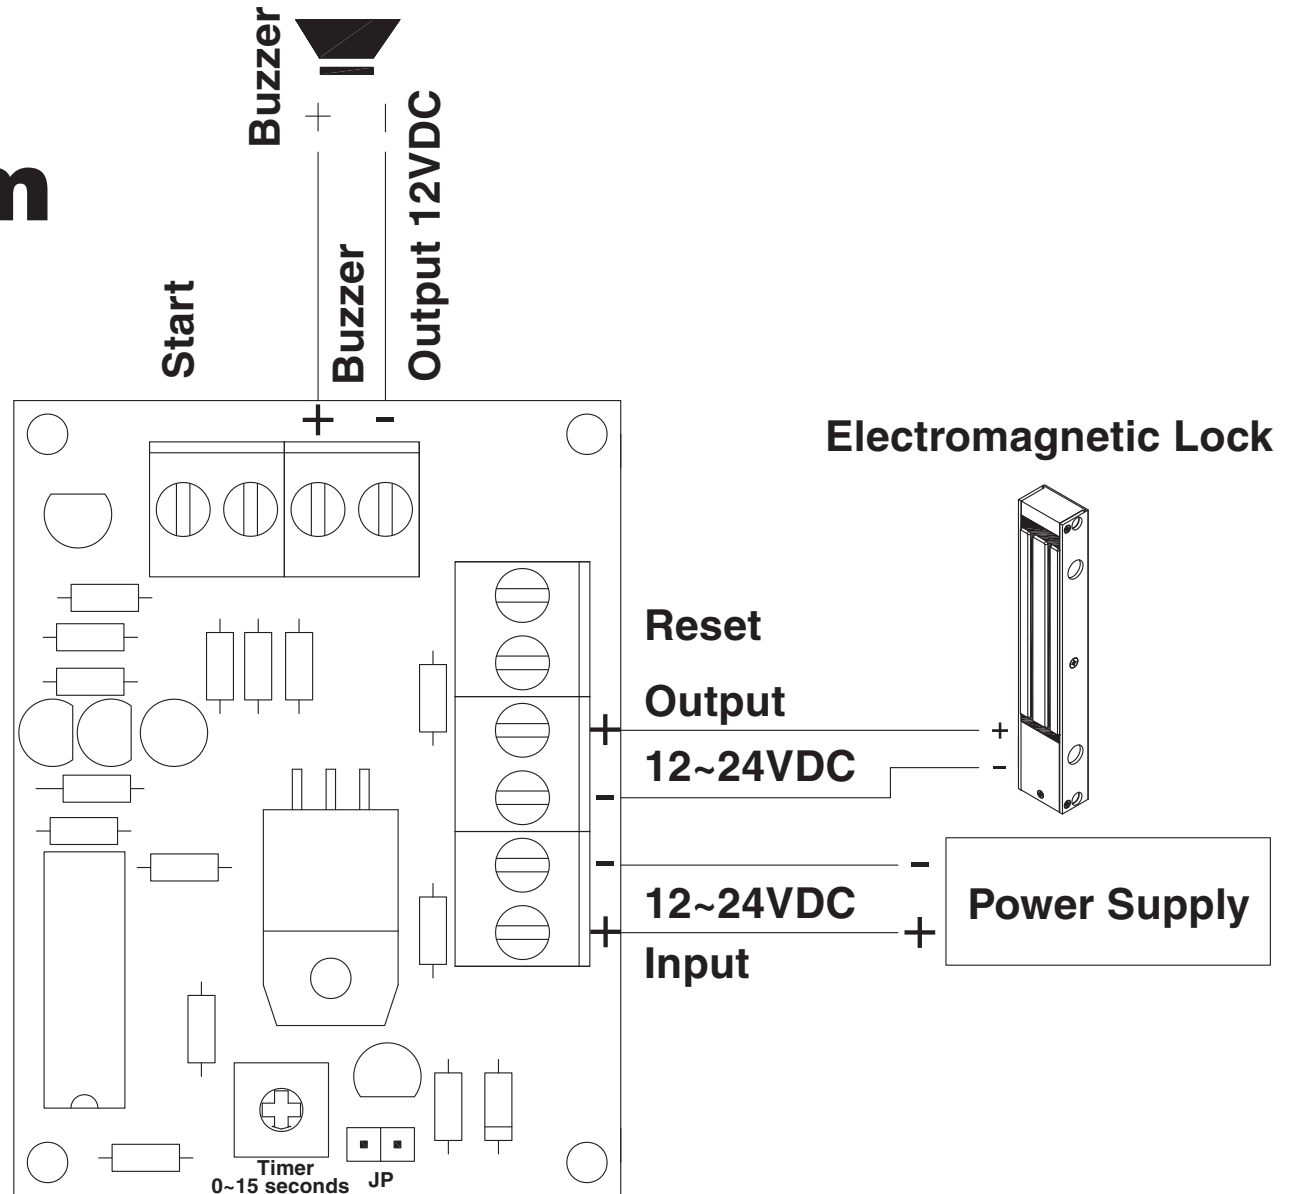

When supplying 24VDC, remove the JP to prevent the IC board from burning.

When supplying less than 12VDC, put on the JP to prevent from failure of the IC board.