

FR-A10001DS

Unmonitored Mini Magnet with Door Status

- Operating voltage 12~24Vdc (*Selectable*)
- Aluminium housing Holding force
- up to 600lbs (*272Kg*)
- Electro-less Nickel Plated Armature
- Fail-Safe
- Door status: An independent contact that works separately from the magnet to show door status not lock status



BS EN1634:1

OPTIONS

A-300BP

A-U320M-DS



A-300ZL

300ZLDC

A-300AL

UGDB14

LD-MM-SC

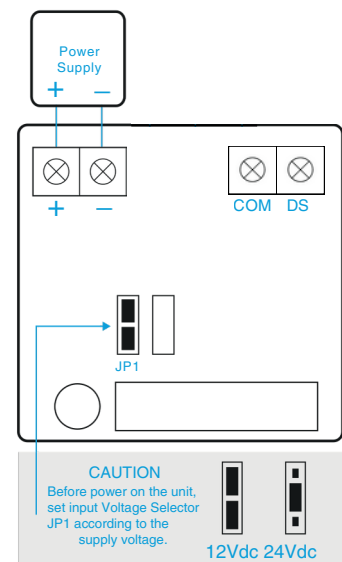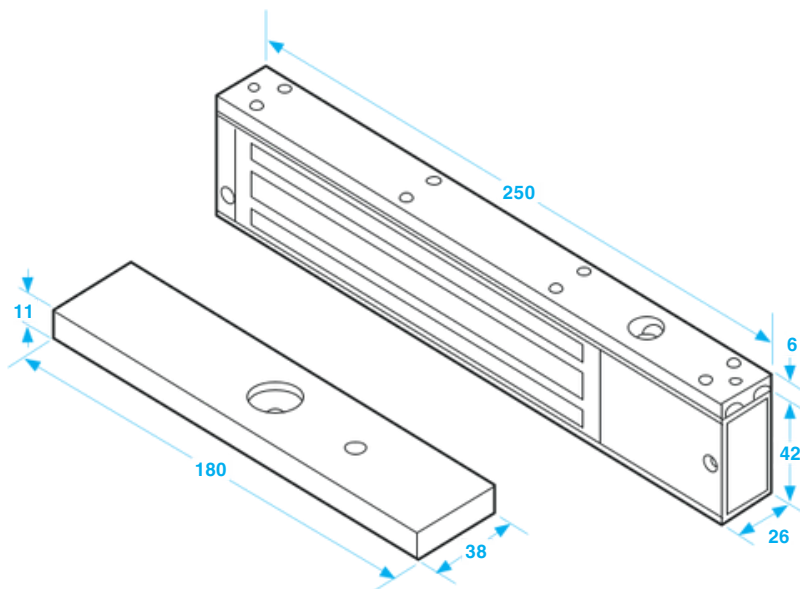

SPECIFICATION

- Voltage tolerance: $\pm 10\%$.
- Current draw: 480mA at 12Vdc, 240mA at 24Vdc (at temperature 20°C).
- Operating temperature: -10~55°C (14 to 131°F).
- Lock's surface temperature: Current temperature $\pm 20\%$ (when power is on).

- Humidity: 0~95% non-condensing.
- Aluminium housing, nickel plated armature.
- Weight: 2.0kg (approx).