




Package 13E High Security – Not for Fire Doors

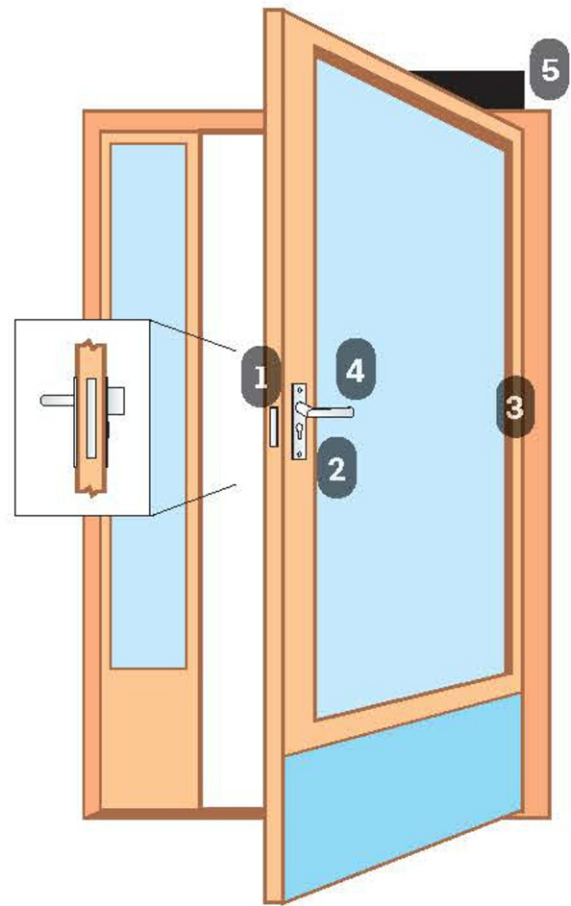

Narrow stile door Read in, free egress (motor lock) – complies with EN179

1. EL418 motor lock
2. CY326 single cylinder – DIN Europrofile
3. DL8 door loop
4. 3192750/115PZ+BL handle
5. DC240 door closer (optional)

ORDERING CODES

ABLOY-EL418-30-PACK13E
ABLOY-EL418-35-PACK13E
ABLOY-EL418-40-PACK13E
ABLOY-EL418-45-PACK13E

High security narrow stile door applications with motor operated deadbolt and latch bolt, inside handle always operates. Key override at all times from outside.

Technical Specification:

Operating voltage: 12 V_{AC} to 18 V_{AC}, 12 V_{DC} to 24 V_{DC} (+15%–10%).

Current draw: 12 V_{DC} 80 mA idle, norm 450 mA, max 1300 mA

24 V_{DC} 40 mA idle, norm 220 mA, max 600 mA.

Backsets available: 30 mm, 35 mm, 40 mm, 45 mm.

Monitoring: Bolt position.

Standards:

EN179 when used with correct furniture

EN61000-6-1

EN1303 (cylinder)

EN14846

