




Package 13MP

Multipoint-Escape-High Sec-Not Fire Doors

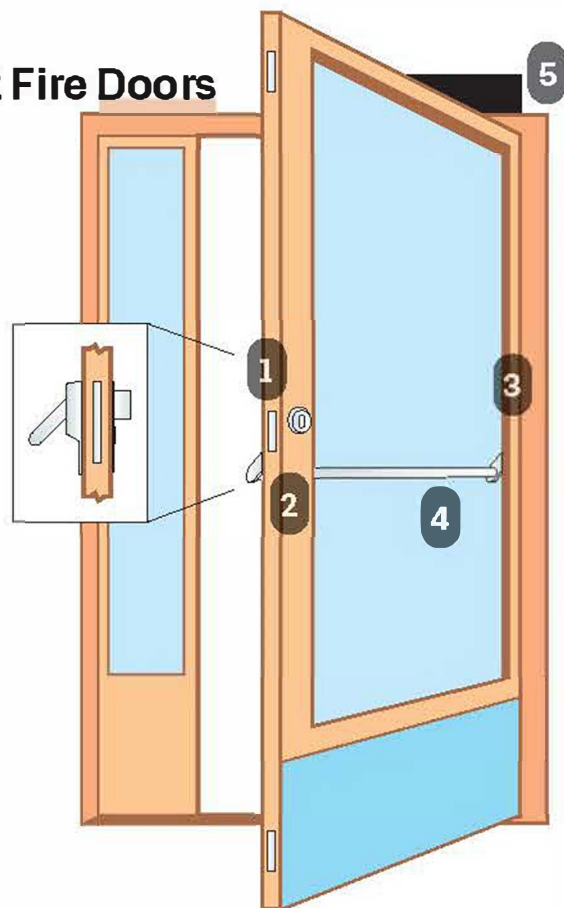

Narrow stile door

Read in, free egress (motor lock) - complies with EN1125

1. MP418 motor lock
2. CY326 single cylinder - DIN Europrofile
3. DL8 door loop
4. PBE011-EL420 Abloy panic bar c/w cylinder escutcheon
5. DC240 door closer (optional)

ORDERING CODES

ABLOY-MP418-30-PACK13MP
 ABLOY-MP418-35-PACK13MP
 ABLOY-MP418-40-PACK13MP
 ABLOY-MP418-45-PACK13MP

High security narrow stile door applications with motor operated deadbolt, hook bolts and latch bolt, inside panic bar always operates. Key override at all times from outside.

Technical Specification:

Operating voltage: 12 V_{AC} to 18 V_{AC}, 12 V_{DC} to 24 V_{DC} (+15%-10%).

Current draw: 12 V_{DC} 80 mA idle, norm 450 mA, max 1300 mA

24 V_{DC} 40 mA idle, norm 220 mA, max 600 mA.

Backsets available: 30 mm, 35 mm, 40 mm, 45 mm.

Monitoring: Bolt position.

Standards:

EN1125 when used with correct furniture

EN61000-6-1

EN1303 (cylinder)

EN14846

