




Package 13P

Escape-High Security-Not for Fire Doors

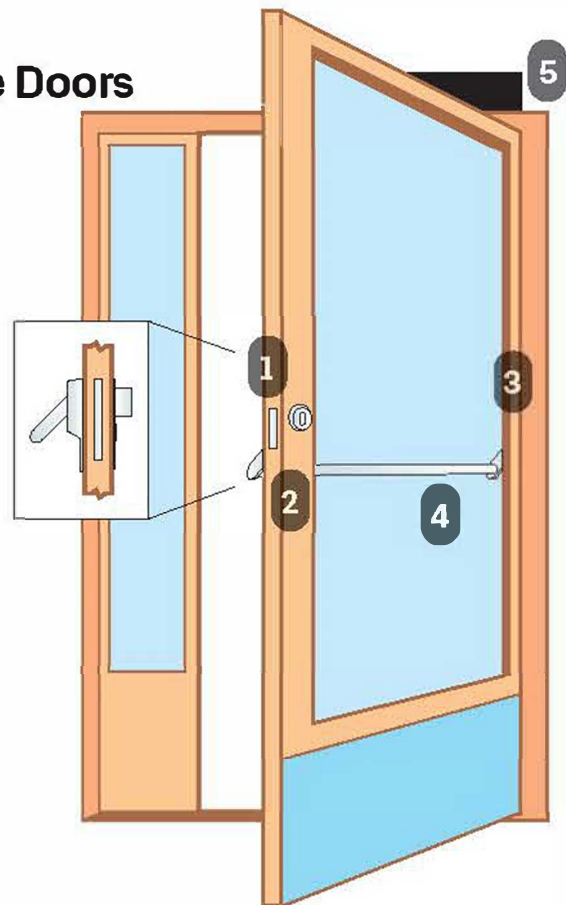

Narrow stile door

Read in, free egress (motor lock) - complies with EN1125

1. EL418 lock case
2. CY326 single cylinder - DIN Europrofile
3. DL8 door loop
4. PBE011-EL420 Abloy Panic Bar with cylinder escutcheon
5. DC240 door closer (optional)

ORDERING CODES

ABLOY-MP418-30-PACK13P

ABLOY-MP418-35-PACK13P

ABLOY-MP418-40-PACK13P

ABLOY-MP418-45-PACK13P

High security narrow stile door applications with motor operated deadbolt and latch bolt, inside panic bar always operates. Key override at all times from outside.

Technical Specification:

Operating voltage: 12 V AC to 18 V AC, 12 V DC to 24 V DC (+15%–10%).

Current draw: 12 V DC 80 mA idle, norm 450 mA, max 1300 mA

24 V DC 40 mA idle, norm 220 mA, max 600 mA.

Backsets available: 30 mm, 35 mm, 40 mm, 45 mm.

Monitoring: Bolt position.

Standards:

EN1125 when used with correct furniture

EN61000-6-1

EN1303 (cylinder)

EN14846

