


Package 14ME

Multipoint-High Security-Not for Fire Doors

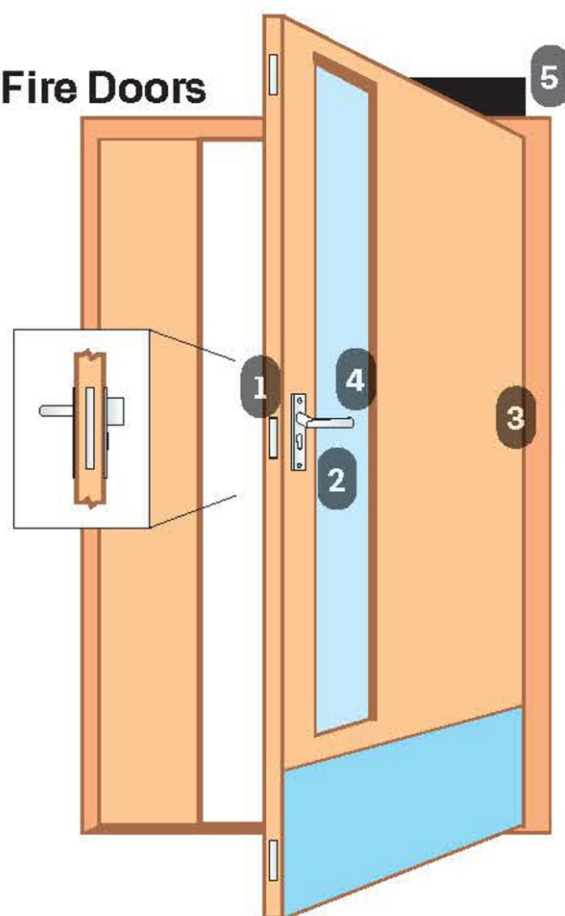

Standard door

Read in, free egress (motor lock) - complies with EN179

1. MP518 motor lock
2. CY326 single cylinder - DIN Europrofile
3. EA280 concealed door loop
4. 319242/115PZ+BL handle
5. DC240 door closer (optional)

ORDERING CODES

ABLOY-MP518-55-PACK14ME

ABLOY-MP518-60-PACK14ME

ABLOY-MP518-65-PACK14ME

High security wood or metal door applications with motor operated deadbolt, hook bolts and latch bolt, inside handle always operates. Key override at all times from outside.

Technical Specification:

Operating voltage: 12 V_{AC} to 18 V_{AC}, 12 V_{DC} to 24 V_{DC} (+15%-10%).

Current draw: 12 V_{DC} 80 mA idle, norm 450 mA 24 V_{DC} 40 mA idle, norm 220 mA.

Backsets available: Standard 65 mm, 55 mm, 60 mm.

Monitoring: Bolt position.

Standards:

EN179 when used with correct furniture

EN61000-6-1

EN1303 (cylinder)

EN14846

