



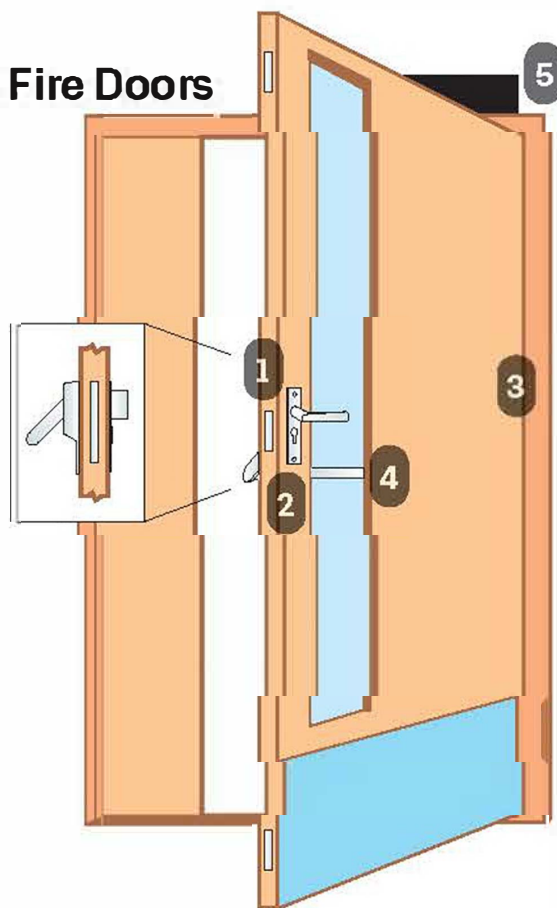

Package 14MP

Multipoint-Escape-High Sec-Not Fire Doors

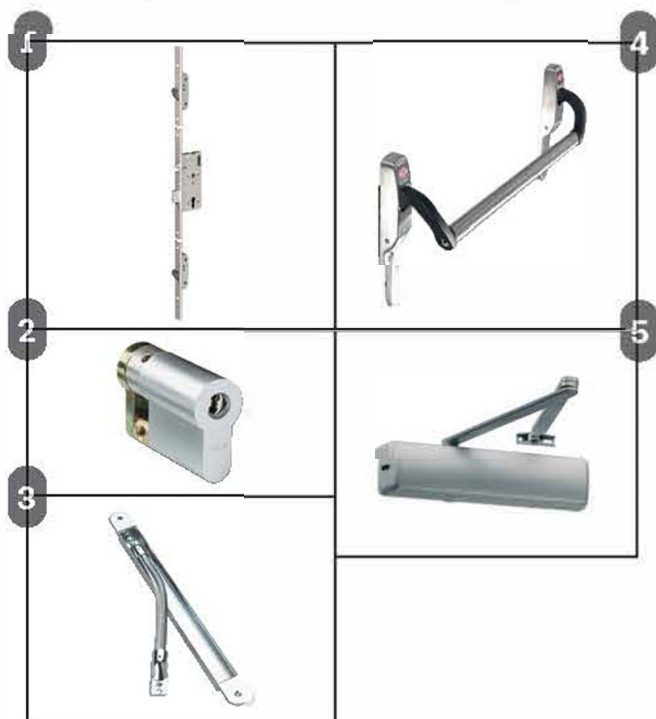

Standard door

Read in, free egress (motor lock) - complies with EN1125

1. MP518 motor lock
2. CY326 single cylinder - DIN Europrofile
3. EA280 concealed door loop
4. PBE011-EL520 Abloy panic bar with cylinder escutcheon
5. DC240 door closer (optional)

ORDERING CODES

ABLOY-MP518-55-PACK14MP

ABLOY-MP518-60-PACK14MP

ABLOY-MP518-65-PACK14MP

High security wood or metal door applications with motor operated deadbolt, hook bolts and latch bolt, inside panic bar always operates. Key override at all times from outside.

Technical Specification:

Operating voltage: 12 V_{AC} to 18 V_{AC}, 12 V_{DC} to 24 V_{DC} (+15%-10%).

Current draw: 12 V_{DC} 80 mA idle, norm 450 mA, max 1430 mA

24 V_{DC} 40 mA idle, norm 220 mA, max 600 mA.

Backsets available: Standard 65 mm, 55 mm, 60 mm.

Monitoring: Bolt position.

Standards:

EN1125 when used with correct furniture

EN1303 (cylinder)

EN12209

EN14846

EN61000-6-1

