
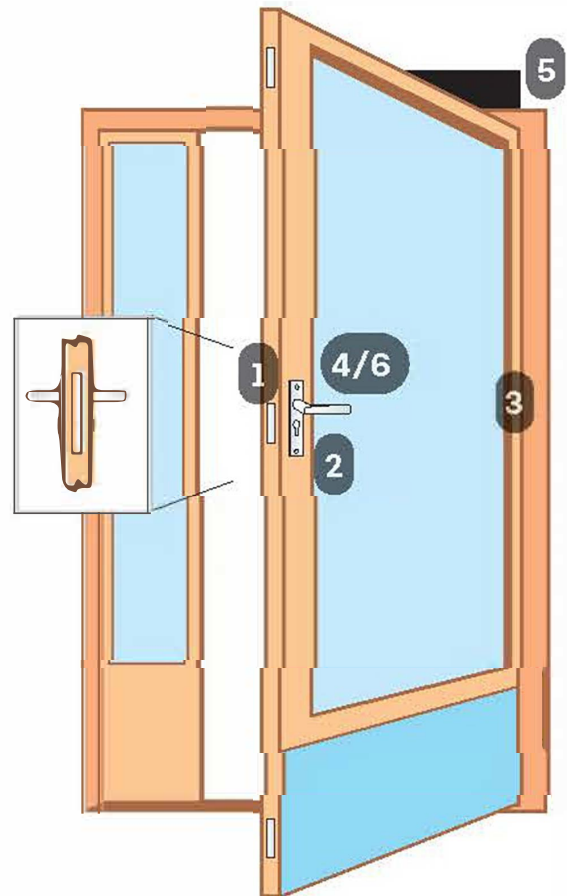


Package 4M Multipoint

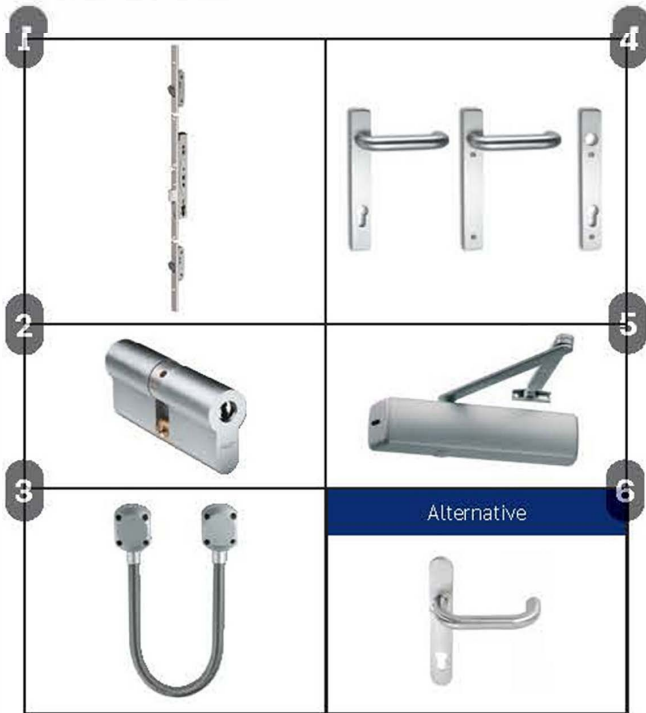

Narrow stile door Multipoint – Read in, read out

1. EL467 solenoid lock
2. CY327 double cylinder – DIN Europrofile
3. DL8 door loop
4. 60-0819-SSS handle set to suite the EL461 & EL467
5. DC240 door closer (optional)
6. 3192750/PZ+PZ (alternative)

ORDERING CODES

ABLOY-EL467-30-PACK4M
 ABLOY-EL467-35-PACK4M
 ABLOY-EL467-40-PACK4M
 ABLOY-EL467-45-PACK4M

Narrow stile door applications with handle operation, both handles controlled and activated on signal from access control system. Key override at all times from both sides.

Technical Specification:

Operating voltage: 12 V DC to 24 V DC stabilised (+15%–10%).

Current draw: 12 V DC 350 mA max 24 V DC 250 mA max.

Backsets available: 30 mm, 35 mm, 40 mm, 45 mm.

Monitoring: RQE on inside handle, bolt position, door position, cylinder operation.

Standards:

EN1634-1

EN61000-6-1

EN1303 (cylinder)

EN14846

