


Package 6ME Multipoint - High Security

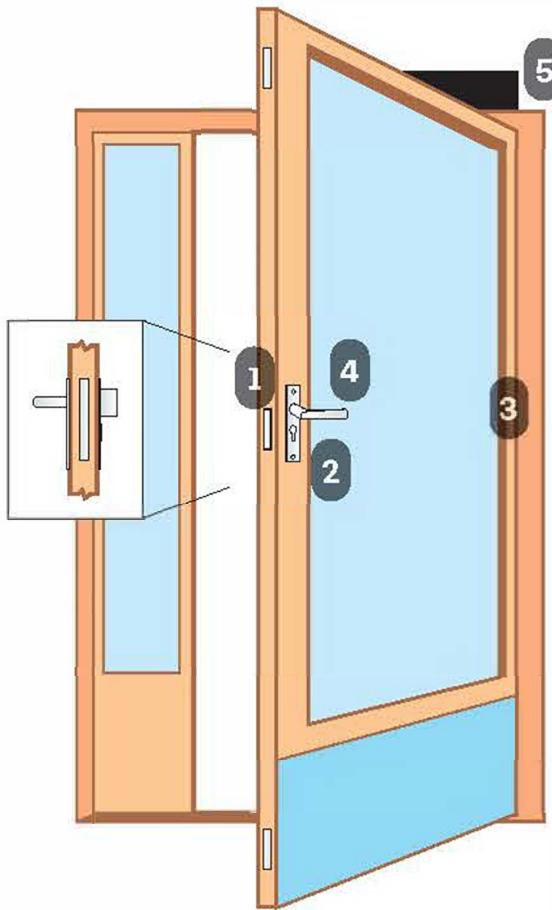

Narrow stile door

Read in, free egress (motor lock) - complies with EN179

1. MP420 motor lock
2. CY326 single cylinder - DIN Europrofile
3. DL8 door loop
4. 60-0719 handle and pullpad
5. DC240 door closer (optional)
6. 3192750/115PZ+BL (alternative)

ORDERING CODES

ABLOY-MP420-30-PACK6ME
ABLOY-MP420-35-PACK6ME
ABLOY-MP420-40-PACK6ME
ABLOY-MP420-45-PACK6ME

High security narrow stile door applications with motor operated deadbolt, hook bolts and latch bolt, inside handle always operates. Key override at all times from outside.

Technical Specification:

Operating voltage: 12 V AC to 18 V AC, 12 V DC to 24 V DC (+15%–10%).

Current draw: 12 V DC 80 mA idle, norm 450 mA, max 1300 mA
24 V DC 40 mA idle, norm 220 mA, max 600 mA.

Backsets available: 30 mm, 35 mm, 40 mm, 45 mm.

Monitoring: RQE on inside handle, bolt position, door position, cylinder operation.

Standards:

EN179 when used with correct furniture
EN1634-1
EN61000-6-1

EN1303 (cylinder)
EN14846

