



A-10005-BLK

Monitored Double Mini Magnet in Black

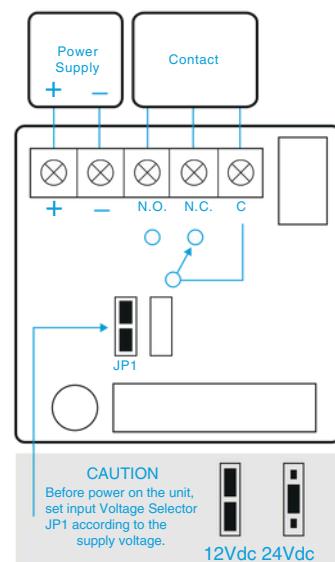

- Operating voltage 12~24Vdc (Selectable)
- Aluminium housing
- Holding force up to 2 x 600lbs (272Kg)
- Electro-less Nickel Plated Armature
- Status LED ● Red ● Green
- Architectural Black Finish

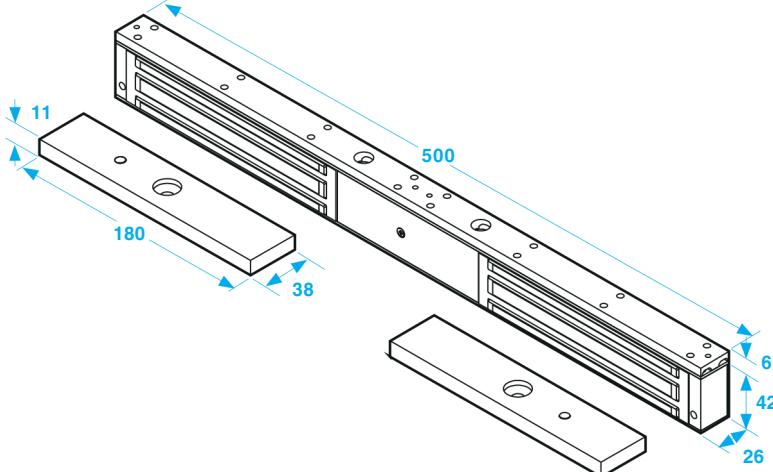

SPECIFICATION

- Voltage tolerance: $\pm 10\%$.
- Current draw: 480mA at 12Vdc, 240mA at 24Vdc (at temperature 20°C).
- Operating temperature: -10~55°C (14 to 131°F).
- Lock's surface temperature: Current temperature $\pm 20\%$ (when power is on).
- Humidity: 0~95% non-condensing.
- Weight: 3.7kg (approx).
- Magnetic bond sensor monitor output remotely monitors the door lock or unlock status. (N.C.Output-Dooropened; N.O.Output-doorclosed)(SPDTrated0.25A at 12Vdc).