



A-10040-BLK

Monitored Double Standard Magnet in Black

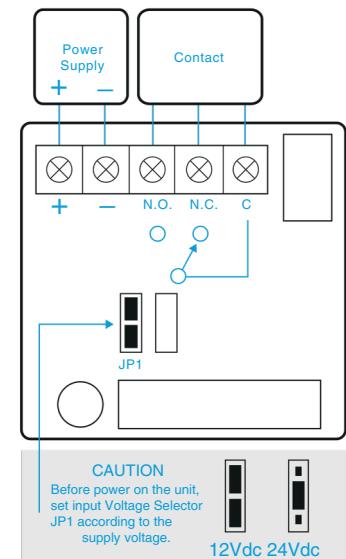

- Operating voltage 12~24Vdc (Selectable)
- Aluminium housing
- Holding force up to 2 X 1200lbs (544Kg)
- Electro-less nickel plated armature
- Status: LED ● Red ● Green
- Architectural Black Finish

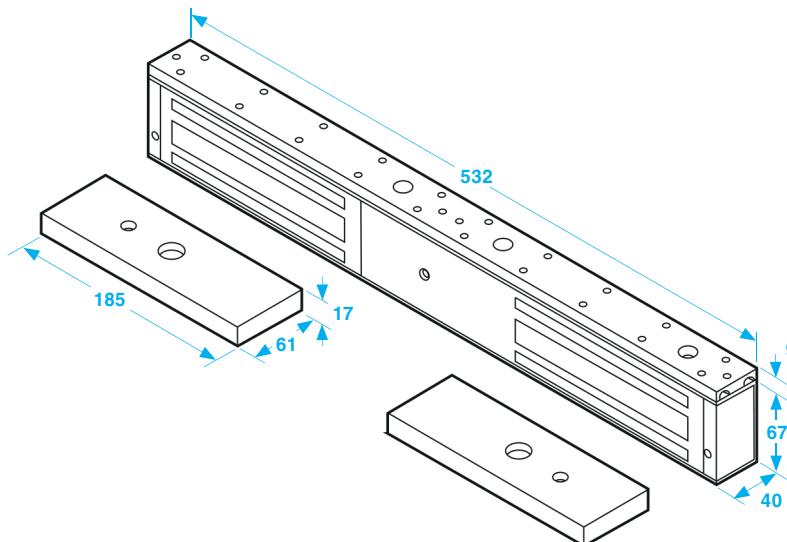

SPECIFICATION

- Voltage tolerance: $\pm 10\%$.
- Current draw: 420mA at 12Vdc, 210mA at 24Vdc (at temperature 20°C).
- Operating temperature: $-10\text{--}55^\circ\text{C}$ ($14\text{--}131^\circ\text{F}$).
- Lock's surface temperature: Current temperature $\pm 20\%$ (when power is on).
- Magnetic bond sensor monitor output remotely monitors the door lock or unlock status. (N.C. Output-Door opened; N.O. Output-door closed) (SPDT rated 0.25A at 12Vdc)
- Humidity: 0~95% non-condensing.
- Aluminium housing, nickel plated armature.
- Weight: 9.3kg (approx).