
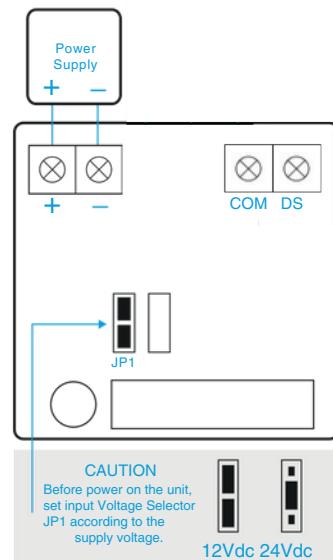


A-10001DS-BLK

Unmonitored Mini Magnet with Doos Status In Black

- Operating voltage 12~24Vdc (Selectable)
- Aluminium housing
- Holding force up to 600lbs (272Kg)
- Electro-less Nickel Plated Armature
- Fail-Safe
- Architectural Black Finish
- Door status: An independent contact that works separately from the magnet to show door status not lock status

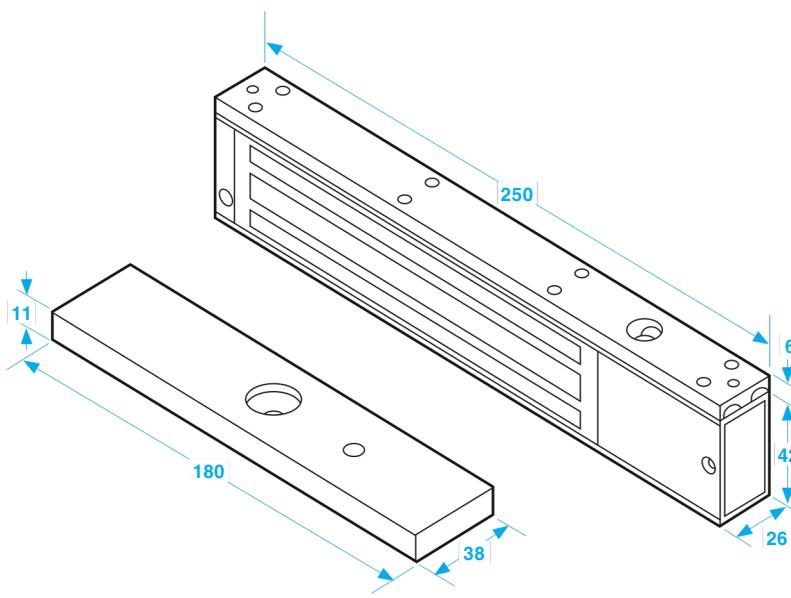

SPECIFICATION

- Voltage tolerance: $\pm 10\%$.
- Current draw: 480mA at 12Vdc, 240mA at 24Vdc (at temperature 20°C).
- Operating temperature: $-10\text{--}55^\circ\text{C}$ ($14\text{ to }131^\circ\text{F}$).
- Lock's surface temperature: Current temperature $\pm 20\%$ (when power is on).
- Humidity: 0~95% non-condensing.
- Aluminium housing, nickel plated armature.
- Weight: 2.0kg (approx).