


LA3218 Series

Compact Aluminium Speed Gates


- Advanced anti-tailgating and anti-reverse protection for stronger security.
- Infrared anti-clip sensors ensure safe passage during lane movement.
- Quiet, smooth operation engineered for durability and long service life.
- Automatic reset function re-locks the lane if no one completes entry.
- Compatible with IC/ID cards, QR scanners, and facial recognition.
- Choose memory or non-memory card modes to suit your system.
- Supports one-way or two-way access for flexible control.
- Selectable normally-open or normally-closed modes to match security needs.
- Standard height of the baffle is 900mm from the floor




LA3218-1
Single Lane

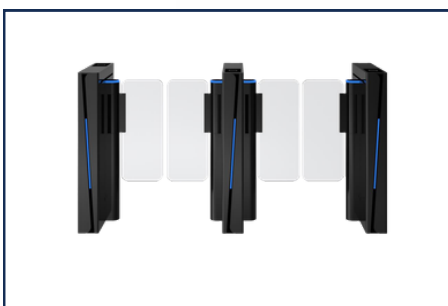


LA3218-2
Two Lanes

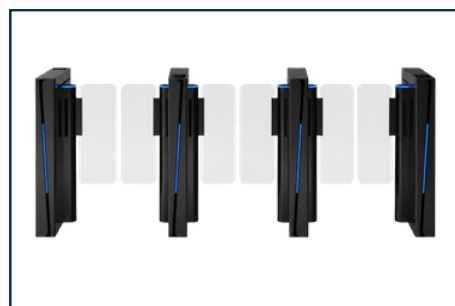

LA3218-3
Three Lanes

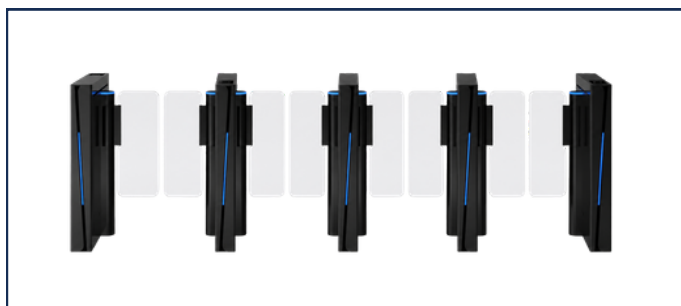

LA3218-4
Four Lanes

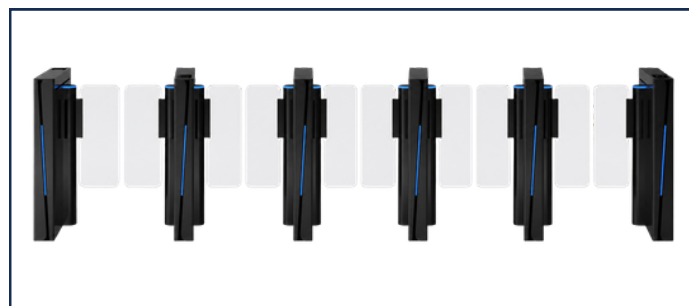

LA3218-5
Five Lanes

Specification:

Pass Rate	35- 50 persons / minute
Material	Top T=3.0mm/ body T=8.0mm
Arm Material	8mm clear acrylic
Power Supply	24v 500W
Pass Width	600 - 900 mm
Movement	Standard Speed Gate Movement
Drive Unit	Brushless Servo Motor
Input Voltage	AC100V - 240V, 50/60Hz
IP Rating	IP4X
Communication Mode	Main Board
Environment	Indoor